


hp StorageWorks

Optical 700ux/1100ux Rack Mount Installation



1

Ensure you have the following components:

- HP StorageWorks Optical 700ux/1100ux Jukebox
- HP Rack System/E or HP 10000 Series Rack (preassembled)
- Rack mount shelf and rails (preassembled), and hardware

2


Open the front and back doors of the rack.



Warning: To avoid risk of personal injury, refer to the rack documentation for instructions on how to fully stabilize the rack before continuing.


3

Shelf Installation

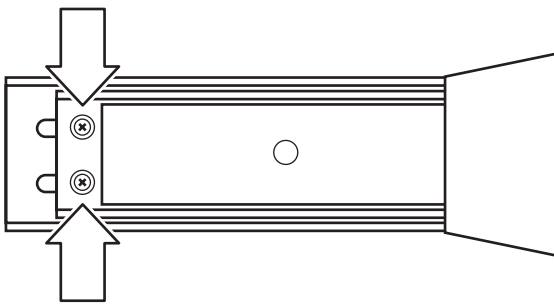

Loosen two #2 Phillips screws on the back of the adjustable rail brackets (both sides). This will allow depth adjustment once installed into the rack.

4

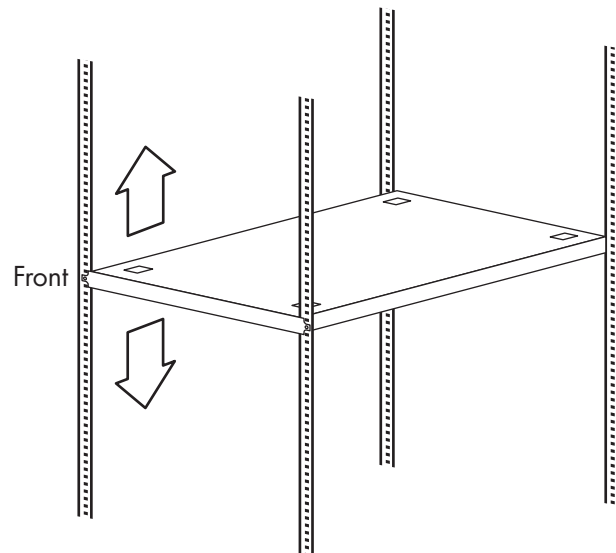

Align the shelf vertically into the rack where desired. Position the rail brackets inside the rack. The thumbscrews on the shelf should face toward the front of the rack, with the cosmetic bezel on the outside..




Warning: To avoid risk of personal injury, two people are required to perform steps 4 through 10. The jukebox weighs approximately 30 kg (66 lbs).

5


Secure the shelf to the rack:

- Install two M6 Phillips screws in locations 1 and 2 as shown. Loosely tighten.
- From the back of the rack, pull the rail brackets fully into position to meet up with the cabinet for proper depth adjustment.
- Install two M6 Phillips screws in locations 3 and 4 as shown. Loosely tighten.
- Install the remaining four M6 screws in locations 5 through 8. Loosely tighten.
- Center the shelf vertically within the U space.
- Fully tighten all screws.

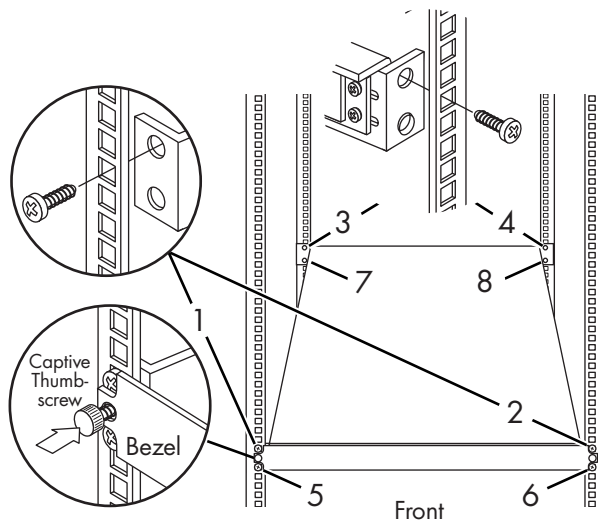

6

Tighten the two screws on the back of the adjustable rail brackets that were previously loosened in step 3.

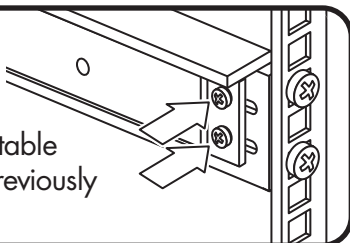

8

Place the jukebox on top of the shelf, making sure that the jukebox feet fit into the holes in the shelf.

From beneath the shelf, secure the jukebox using six #2 Phillips screws (3 in front and 3 in back). You may need to align the jukebox and shelf screw holes.

9


Slide the shelf and jukebox back into the rack. Secure the front of the shelf to the rack by tightening the 2 captive thumbscrews (one on each side).



Note: Refer to the *HP StorageWorks Optical 700ux/1100ux Setup Guide* and *Getting Started* poster to complete the jukebox setup.

7

Jukebox Installation

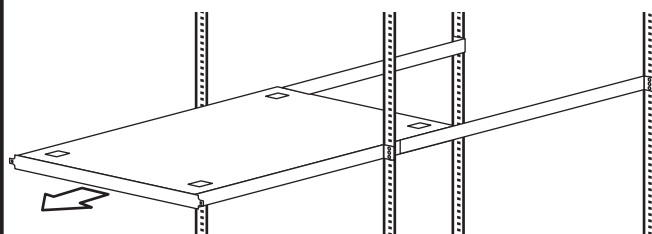

Fully extend the shelf out of the front of the rack.

Getting Help

- HP Product Information Site:
<http://www.hp.com/go/udo>
- HP Technical Support and Phone Numbers:
<http://www.hp.com/support>
- HP StorageWorks Library and Tape Tools (L&TT) diagnostic software:
<http://www.hp.com/support/tapetools>

© 2004 Hewlett-Packard Development Company, L.P.

First Edition (September 2004)
Part Number: AD505-96001



AD505-96001